


# Centre Scientifique et Technique du Bâtiment

84, avenue Jean Jaurès  
Champs-sur-Marne  
F-77447 Marne La Vallée Cedex 2  
Tél. : (33) 01 64 68 82 82  
Fax : (33) 01 60 05 70 37

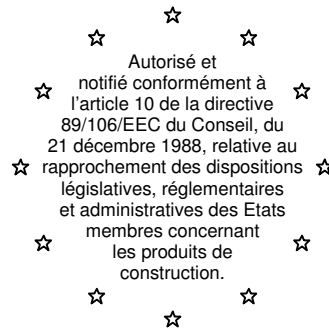

## European Technical Approval **ETA-06/0030**

(English language translation, the original version is in French language)

**Trade name:**

Nom commercial:

**TOPFIX**

**Holder of approval:**

Titulaire:

**AXTER**

**8, rue Félix d'Hérelle  
F-75016 PARIS**

**Generic type and use of  
construction product:**

Type générique et utilisation prévue du  
produit de construction:

**Systems of mechanically fastened flexible roof  
waterproofing membranes**

Systèmes de feuilles souples d'étanchéités de toitures fixés  
mécaniquement

**Validity from:**

**to:**

Valide du/au :

**10/07/2006**

**09/07/2011**

**Manufacturing plant:**

Usine de fabrication:

**Usine AXTER**

**1, rue Joseph Coste  
F-59552 COURCHELETTES**

**This European Technical Approval  
contains:**

Le présent Agrément Technique Européen  
contient:

**44 pages including 34 annexes which form an integral part  
of the document.**

44 pages incluant 34 annexes faisant partie intégrante du document.



European Organisation for Technical Approvals  
Organisation pour l'Agrément Technique Européen

## I LEGAL BASES AND GENERAL CONDITIONS

- 1 - This European Technical Approval is issued by the Centre Scientifique et Technique du Bâtiment (CSTB) in accordance with:
  - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products<sup>1</sup>, modified by the Council Directive 93/68/EEC of 22 July 1993<sup>2</sup>;
  - Décret no. 92-647 du 8 juillet 1992<sup>3</sup> concernant l'aptitude à l'usage des produits de construction;
  - Common Procedural Rules for Requesting, Preparing and the Granting of European Technical Approvals set out in the Annex of Commission Decision 94/23/EC<sup>4</sup>;
  - Guide d'Agrément Technique Européen "Systèmes de feuilles souples d'étanchéités de toitures fixés mécaniquement" n°006, Mai 2002, french version of the ETAG 006, March 2000.
- 2 - The Centre Scientifique et Technique du Bâtiment is authorised to check whether the provisions of this European Technical Approval are met. Checking may take place in the manufacturing plant (for example concerning the fulfilment of assumptions made in this European Technical Approval with regard to manufacturing). Nevertheless, the responsibility for the conformity of the products with the European Technical Approval and for their fitness for the intended use remains with the holder of the European Technical Approval.
- 3 - This European Technical Approval is not to be transferred by CSTB to manufacturers or agents of manufacturer other than those indicated on page 1; or manufacturing plants other than those indicated on page 1 of this European Technical Approval.
- 4 - This European Technical Approval may be withdrawn by the Centre Scientifique et Technique du Bâtiment pursuant to Article 5 of the Council Directive 89/106/EEC.
- 5 - Reproduction of this European Technical Approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of the Centre Scientifique et Technique du Bâtiment. In this case, partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European Technical Approval.
- 6 - The European Technical Approval is issued by the approval body in its official language. This version corresponds to the version circulated within EOTA. Translations into other languages have to be designated as such.

<sup>1</sup> Official Journal of the European Communities no. L 40, 11.2.1989, p. 12

<sup>2</sup> Official Journal of the European Communities no. L 220, 30.8.1993, p. 1

<sup>3</sup> Journal Officiel de la République française du 14 juillet 1992

<sup>4</sup> Official Journal of the European Communities no. L 17, 20.1.1994, p. 34

## II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

### 1 Definition of product and intended use

#### 1.1 Definition of product

The systems of mechanically fastened flexible roof waterproofing membrane, subject of this ETA and called MEFAWAME in the text, are waterproofing kits composed of two-layers flexible roof waterproofing systems fastened mechanically with point fasteners to the structure, with a slope  $\geq 1\%$ . The first layer is fastened, with welded overlappings. The second layer is welded.

The MEFAWAME is composed of flexible membranes manufactured by the holder of the approval and mechanical fasteners manufactured by others manufacturers.

#### 1.1.1 Membranes

First layer (fastened)	Second layer
TOPFIX FMP grésé	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
TOPFIX FMP	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
TOPFIX PY FMP Grésé	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
TOPFIX PY FMP	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> </ul>

	<ul style="list-style-type: none"> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
MATFLEX VV FMP	<ul style="list-style-type: none"> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
MATFLEX PY FMP	<ul style="list-style-type: none"> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>

### Composition of the membranes

Membrane	Bitumen	Average thickness on selvedge (mm)	Reinforcement	Surface	Underside
TOPFIX FMP	Elastomeric (SBS) binder	2.65	Reinforced polyester	Macro-perforated film and sand	Thermofusible film
TOPFIX FMP grésé	Elastomeric (SBS) binder	2.65	Reinforced polyester	Macro-perforated film and sand	Sand
TOPFIX PY FMP	Elastomeric (SBS) binder	2.65	Reinforced polyester	Macro-perforated film and sand	Thermofusible film
TOPFIX PY FMP grésé	Elastomeric (SBS) binder	2.65	Reinforced polyester	Macro-perforated film and sand	Sand
MATFLEX VV FMP	Elastomeric (SBS) binder	2.8	Glass fibre	Macro-perforated film and sand	Polyester
MATFLEX PY FMP	Elastomeric (SBS) binder	2.8	Reinforced polyester	Macro-perforated film and sand	Polyester
TOPAZ 25	Elastomeric (SBS) binder	2.65	Glass fibre	Slate chippings or mineral granules	Thermofusible film
TOPAZ 25 Grésé	Elastomeric (SBS) binder	2.65	Glass fibre	Slate chippings or mineral granules	Sand
HYRENE 40 PY	Elastomeric (SBS) binder	2.65	Reinforced polyester	Slate chippings or mineral granules	Sand
HYRENE 40 PY FP	Elastomeric (SBS) binder	2.65	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
FORCE 4000 S	Elastomeric (SBS) binder	4.0	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
FORCE 4000 S FE	Elastomeric (SBS) binder	4.0	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
FORCE 4000 FMG	Elastomeric (SBS) binder	4.0	Reinforced polyester	Slate chippings or mineral granules	Sand
FORCE 4000 FMG FE	Elastomeric (SBS) binder	4.0	Reinforced polyester	Slate chippings or mineral granules	Sand
RUBEROOF 4025 A	Elastomeric (SBS) binder	4.0	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
ALPAL DECOR CPV	ALPA®	4.0	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
ALPAL DECOR CPV FE	ALPA®	4.0	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
EXCELSTRUCTURAL	ALPA®	3.2	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film

EXCELFLEX	ALPA®	3.4	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
EXCELFLEX FE	ALPA®	4.2 <sup>(1)</sup>	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
FORCE 50 G FM	Elastomeric (SBS) binder	4.2 <sup>(1)</sup>	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film
PYE PV 200 S5	Elastomeric (SBS) binder	5.2 <sup>(2)</sup>	Reinforced polyester	Slate chippings or mineral granules	Thermofusible film

(1) Average thickness on mineral granules

(2) Minimum thickness on mineral granules

The characteristics of these membranes are presented in Annexes 1 to 22. For all the membranes with mineral protection, the loss of mineral granule, tested in conformity with the EN 12039, is < 30%.

### 1.1.2 Fasteners

The different fasteners, manufactured by the manufacturer LR ETANCO, can be:

- screw VMS 2C + plate Ø40
- screw VMS 2C + plate 64x64
- screw VMS 2C + plate 40x40
- screw VMS 2C + plate AXTER®

#### Composition of fasteners:

##### Screw

- VMS 2C: hardened carbon steel screw. Diameter of 4,8 mm, length L and with a 8.5 mm circular head. Supracoat corrosion protection. Resistance at 15 Kesternich cycles (EN ISO 6988).

##### Plates

- Ø40 : steel plate Ø40 mm, thickness 0.8 mm. Hole Ø 4.5 mm. Aluzinc AZ 150 protection.
- 40x40 : steel plate 40x40 mm, thickness 0.8 mm. Hole Ø 4.5 mm. Aluzinc AZ 150 protection.
- 40x40 AXTER® : steel plate 40x40 mm with a border, thickness 0.8 mm. Hole Ø 5.5 mm. Aluzinc AZ 150 protection.
- 64x64 : steel plate 64x64 mm, thickness 0.8 mm. Hole Ø 6 mm. Aluzinc AZ 150 protection

All the fasteners are conform to the specifications of the ETAG 006. They own a *Fastener PASS "Intermediate evaluation in compliance with the European Technical Approval Guideline n°006"*. The characteristics of the fasteners are presented in annex 23.

The flexible membranes and the fasteners are commercialised in separate transactions and assembled on site.

The different kits are presented in Annexes 24 and 25.

The holder of the ETA is fundamentally responsible of the kit.

### 1.2 Intended use

The kits for the waterproofing of roof surfaces against penetration of atmospheric water are intended for uses where requirements concerning safety in case of fire, hygiene, health and the environment and safety in use as well as the durability in the sense of the essential requirements N° 2 to N° 4 of the Directive 89/106/EEC shall be satisfied.

The bearing elements are metallic, in concrete, in lightweight concrete or in wood. The bearing elements can be direct substrates of the MEFAWAME. In the case where the insulation is the direct substrate of the MEFAWAME, it shall be conform with the requirements of § 4.2.2. The insulation is not a part of the kit.

In the manufacturer's technical dossier (MTD)<sup>5</sup> to this European technical approval (ETA) the manufacturer gave information concerning the substrate which the roof waterproofing is suitable for.

The verifications which are based on this ETA give reason for the assumption of an intended working life of the roof waterproofing of at least 10 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

The part of the MTD to this ETA to be treated confidentially is deposited with CSTB and, as far as this is relevant to the tasks of the notified body involved in the procedure of attestation of conformity, shall be handed over to the notified body.

## **2 Characteristics of product and methods of verification**

### 2.1 Characteristics of products and systems

The components of the roof waterproofing kit show the characteristic values with respect to the permissible tolerances which are stated in the MTD to this ETA.

The ETA is issued for the kit on the basis of the product composition deposited with CSTB. Changes to the components of the kit or in the production process of the components, which could result in the production process and/or the properties of the product deposited being incorrect should be notified to CSTB before the changes are introduced. CSTB will decide whether or not such changes affect the ETA and consequently the validity of the CE marking on the basis of the ETA and if so whether further assessment/alterations to the ETA shall be necessary.

The performances of the bituminous membranes, the fasteners and the kits are presented in Annexes 1 to 26.

### 2.2 Methods of verification

Assessment of the fitness of the roof waterproofing for the intended use with regard to the essential requirements N° 2 to N° 4 was performed following the "Guideline for European Technical Approval of systems of mechanically fastened flexible roof waterproofing membranes" (ETAG 006).

According to the manufacturer's declaration the roof waterproofing taking account of the EU database<sup>6</sup> does not contain any dangerous or forbidden substances.

Within the scope of this approval there may be other requirements applicable to dangerous substances resulting from transposed European legislation or applicable national regulations and administrative provisions.

<sup>5</sup> The manufacturer's technical dossier (MTD) comprises all information necessary for the production and the processing of the product. It was checked by CSTB and it was found to be in accordance with the conditions stated in the approval and the characteristic values determined during the approval testing. The part of the MTD to this ETA to be treated confidentially is deposited with CSTB and, as far as this is relevant to the tasks of the notified body involved in the procedure of attestation of conformity, shall be handed over to the notified body.

<sup>6</sup> Database "Dangerous substances" on the website <http://europa.eu.int/comm/enterprise/construction/internal/dangsub/dangmain.htm>, version 17 march 2003

These requirements need also to be complied with. Moreover, this assessment could be extended with other requirements applicable to the products, resulting from the application of other national regulations and administrative provisions.

### 3 Evaluation of Conformity and CE marking

#### 3.1 Attestation of conformity system

The European Commission according to the decision (98/143/EC of February 1998, Official Journal of the European Communities No. L 42, 14.02.1998) on the Procedures of Attestation of Conformity has, for this type of product, laid down a: **System 2+**, for the procedure of attestation of conformity (Annex III, clause 2(ii) first possibility of Directive 89/106/EEC) for Systems of mechanically fastened flexible roof waterproofing membranes. The system of attestation of conformity 2+ (referred to as system 2+) provides:

- a) Tasks of the manufacturers:
  1. Initial type testing of the product
  2. Factory production control
- b) Tasks of the Notified Body:
  3. initial inspection of factory and of factory production control (FPC)
  4. continuous surveillance, assessment and approval of factory production control

#### 3.2 Responsibilities

##### 3.2.1 Tasks of the manufacturer

##### 3.2.1.1 Factory production control

The manufacturer of flexible membranes and the manufacturers of fasteners have different factory production control (FPC) systems.

The manufacturer of flexible membranes has a factory production control (FPC) system in its plant and exercises permanent internal control of production. This FPC is conform to the EN 13707. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures. This production control system ensures that the product is in conformity with the European Technical Approval.

The manufacturers of fasteners have a factory production control system in their plant and exercise permanent internal control of production. This FPC is conform to the ETAG 006. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures. This production control system ensures that the product is in conformity with the European Technical Approval.

The manufacturer of flexible membranes and the manufacturers of fasteners shall use raw materials or components that comply with the indications of the MTD. The content of the control plan has been checked by CSTB and is stipulated in the MTD.

The results of the factory production control shall be recorded and evaluated. The records shall include at least the following information :

- Name of the product and the raw materials,
- Type of inspection or control,
- Date of manufacture of the product, batch number, and date of inspection or control of the product,

- Results of inspections or controls and, as far as applicable, comparison with requirements,
- Signature of the person responsible for factory production control or his representant.

The records shall be kept for at least five years. On request, they shall be presented to CSTB.

The control plan is a confidential part of the MTD and is deposited with CSTB.

#### 3.2.1.2 Initial type-testing of the product

The initial type-testing refers to the product properties stated in EOTA Guideline 006 to this European technical approval.

The verifications underlying this ETA have been furnished on samples (membranes and fasteners) from the current production. These will replace the initial type-testing.

After changing the production process or starting the production in another manufacturing plant the initial type-testing shall be repeated.

#### 3.2.1.3 Other tasks of the manufacturer

The manufacturers shall, on the basis of a contract, involve a body which is notified for the tasks referred to in section 3, in the field of the product in order to undertake the actions laid down in section 3.2.2. For this purpose, the control plan referred to in section 3.2.2 shall be handed over by the manufacturer to the notified body involved.

### 3.2.2 Tasks of the Notified Bodies

#### 3.2.2.1 Initial inspection of factory and production control.

The CSTB ascertains that, in accordance with the MTD, factory conditions and production control allow the manufacturer to ensure the consistency and homogeneity of the manufactured product and its traceability, thus guaranteeing that the final characteristics of the product are those indicated in chapter 2.

#### 3.2.2.2 Continuous surveillance, assessment and approval of Factory Production Control

The Notified Body shall visit the factory of flexible membranes and the factories of fasteners once a year.

Surveillance of the manufacturing processes shall include:

- Checking the documentation of factory production control, to ensure continuing compliance with the provisions of the ETA,
- Identification of changes by comparing data obtained during the initial inspection or during the last inspection.

In the event the ETA provisions are not complied with, the certificate of conformity shall be withdrawn by the notified body and CSTB will be informed without delay.

### 3.3 CE Marking

The CE marking shall be affixed on the kit, components itself/themselves, an attached label, the packaging, or the accompanying commercial document.

The required information to accompany the symbol "CE" is :

- name or identifying name of the producer,
- number of the notified body involved (system 2+),
- number of the certificate of conformity of the Factory Production Control (system 2+)
- last two digits of the year in which the CE marking was affixed,
- number of the ETA,
- number of the ETAG.

The components shall be marked as belonging to the kit TOPFIX.

<b>4 Assumptions under which the fitness of the product for the intended use was favourably assessed</b>
--

#### 4.1 Installation and design

Information concerning installation, design and dimension are part of the non confidential part of the MTD.

See Technical Notices in Annexes 27 to 36.

The flexible membranes manufacturer's installation guide forms part of this ETA.

The design of the roof intended to be covered by the mechanically fastened roof waterproofing system should take account of the following factors :

- Dead and imposed loads
- Design wind pressure
- Structural strength, stiffness and deflection limits
- Attachment of the roof deck to the structural framing
- Provision of insulation
- Assessment of condensation risk and provision of vapour control layers
- Sound insulation
- Fire precautions
- Roof attachments, fixtures and penetrations
- Falls and drainage
- Means of access for inspection and maintenance

#### 4.2 Substrates

The substrate onto which the waterproofing kit is to be laid should be sufficiently rigid, dense, and dimensionally stable to support the system (membrane + insulation). Its nature will depend on the type of roof selected (warm deck, cold deck or inverted) and in turn will have a direct influence on the method of attachment.

In order to support the loads imposed by traffic, insulation materials for use in warm decks should be capable of resisting permanent deformation or damage when subjected to concentrated loads. They should have a dust-free surface and sufficient laminar strength to resist with a margin of safety and stress imposed by wind uplift forces.

It shall be ensured that the insulation material on site has:

- a 10% compression  $\geq 60\text{kPa}$  (EN 826)
- a point load behaviour  $\geq 500\text{ Pa}$ , deformation 5 mm (EN 12430)

The insulation material must be CE marked according to the harmonized European standard.

#### 4.3 Flexible membranes manufacturer's responsibilities

It is the manufacturer's responsibility to make sure that all those who use the kit are appropriately informed about the specific conditions according to sections 1,

2, 4, and 5 including the annexes to this ETA and the not confidential parts of the MTD to this ETA.

## 5 Informations by the manufacturer

Information about packaging, transport, storage, maintenance and repair are part of the non confidential part of the MTD.

### 5.1 Packaging, transport and storage

This product is not toxic, so it is not necessary to follow any safety instructions for transport and handling.

Storage must be at temperatures between -25°C and 45°C, in dry, and protected against direct sunlight.

Rolls must always be stored vertically.

The product must keep away from any source of heat, sparks, flame, etc.

### 5.2 Maintenance and repair of the works

The assessment of the fitness for use is based on the assumption that a normal maintenance of the system is performed.

This maintenance shall include :

- inspections of the roof at regular interval, e.g. twice a year
- this inspection should include :
  - cleaning of downpipes and leaf filters
  - removal of stones, branches and leaves...
  - inspection of flashings along the edge of the roof, chimneys, drains and roof lights
  - removal of organic growths such as vines
- Elastic joints around cover strips should be inspected every 5 years and replaced if necessary
- Flashings to caps, drains etc. should be inspected every 5 years and replaced if necessary
- Abrasion and minor impact damage shall be repaired.

When replacing components they shall be approved by the manufacturer and covered by the ETA.

**The original version is signed by  
H. BERRIER**

**Technical Director of CSTB**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## TOPFIX FMP grésé

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES					
							mini	Maxi				
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR						
		Width										
		After heat ageing EN 1296	Length									
	Average strength	Width										
		Before heat ageing	Length									
		Width										
After heat ageing EN 1296	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR						
		Width										
	After heat ageing EN 1296	Length										
	Width											
Flexibility at low temperature	Surface	Before heat ageing	EN 1109	°C	-14	Decrease after ageing ≤ 15°C	≤					
		After heat ageing EN 1296										
	Underside	Before heat ageing							-18	Decrease after ageing ≤ 15°C	≤	
		After heat ageing EN 1296										
Resistance to tearing (nail shank)	Length	EN 12310-1	N	170	140	220						
	Width							170				
Tensile properties: maximum tensile force	Length	EN 12311-1	N/50 mm	450	320	490						
	Width							270	250	310		
Tensile properties: elongation	Length	EN 12311-1	%	30	10	45						
	Width							55	10	80		
Resistance to impact		EN 12691	mm	20	≤							
Resistance to static loading		EN 12730	kg	10	≥							
Dimensional stability		EN 1107-1	%	0.3	≤							
Watertightness		EN 1928:2000	-	Pass								
Water vapour transmission properties		EN 1931	-	μ=20000								
Reaction to fire		EN 13501-1	-	F								

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of TOPFIX FMP grésé

**Annex 1**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## TOPFIX FMP

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES					
							mini	Maxi				
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR						
		After heat ageing EN 1296	Width									
	Average strength	Before heat ageing	Length									
		After heat ageing EN 1296	Width									
		Before heat ageing	Length									
		After heat ageing EN 1296	Width									
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR						
		After heat ageing EN 1296	Width									
	Surface	Before heat ageing							EN 1109	°C	-14	≤
		After heat ageing EN 1296									Decrease after ageing ≤ 15°C	
Underside	Before heat ageing		-18	≤								
	After heat ageing EN 1296		Decrease after ageing ≤ 15°C									
Resistance to tearing (nail shank)	Length		EN 12310-1	N	170	140	220					
	Width				170	120	240					
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	450	320	490					
	Width				270	250	310					
Tensile properties: elongation	Length		EN 12311-1	%	30	10	45					
	Width				55	10	80					
Resistance to impact			EN 12691	mm	20		≤					
Resistance to static loading			EN 12730	kg	10		≥					
Dimensional stability			EN 1107-1	%	0.3		≤					
Watertightness			EN 1928:2000	-	Pass							
Water vapour transmission properties			EN 1931	-	μ=20000							
Reaction to fire			EN 13501-1	-	F							

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of TOPFIX FMP

**Annex 2**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## TOPFIX PY FMP grésé

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR		
		Width						
	After heat ageing EN 1296	Length						
	Width							
Average strength	Before heat ageing		Length					
			Width					
	After heat ageing EN 1296		Length					
			Width					
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR		
		Width						
	After heat ageing EN 1296	Length						
	Width							
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-14		≤
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
	Underside	Before heat ageing				-18		≤
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
Resistance to tearing (nail shank)	Length			EN 12310-1	N	240	180	300
	Width					280	230	360
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	780	500	900
	Width					650	500	730
Tensile properties: elongation	Length			EN 12311-1	%	45	25	55
	Width					50	25	60
Resistance to impact				EN 12691	mm	20		≤
Resistance to static loading				EN 12730	kg	20		≥
Dimensional stability				EN 1107-1	%	0.3		≤
Watertightness				EN 1928:2000	-	Pass		
Water vapour transmission properties				EN 1931	-	μ=20000		
Reaction to fire				EN 13501-1	-	F		

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of TOPFIX PY FMP grésé

**Annex 3**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## TOPFIX PY FMP

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length Width	EN 12316-1	(N/50mm)	NR		
		After heat ageing EN 1296	Length Width					
	Average strength	Before heat ageing	Length Width					
		After heat ageing EN 1296	Length Width					
Shear resistance of joints	Maximal strength	Before heat ageing	Length Width	EN 12317-1	(N/50mm)	NR		
		After heat ageing EN 1296	Length Width					
Flexibility at low temperature	Surface	Before heat ageing	EN 1109	°C	-14	Decrease after ageing ≤ 15 °C	≤	
		After heat ageing EN 1296			-18			
	Underside	Before heat ageing			Decrease after ageing ≤ 15 °C	≤		
		After heat ageing EN 1296						
Resistance to tearing (nail shank)	Length	EN 12310-1	N	240	180	300		
	Width			280	230	360		
Tensile properties: maximum tensile force	Length	EN 12311-1	N/50 mm	780	500	900		
	Width			650	500	730		
Tensile properties: elongation	Length	EN 12311-1	%	45	25	55		
	Width			50	25	60		
Resistance to impact			EN 12691	mm	20	≤		
Resistance to static loading			EN 12730	kg	20	≥		
Dimensional stability			EN 1107-1	%	0.3	≤		
Watertightness			EN 1928:2000	-	Pass			
Water vapour transmission properties			EN 1931	-	μ=20000			
Reaction to fire			EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of TOPFIX PY FMP

### Annex 4

of European  
Technical Approval  
ETA-06/0030



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## MATFLEX VV FMP

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES												
							mini	Maxi											
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR													
		After heat ageing EN 1296	Width																
	Average strength	Before heat ageing	Length						EN 12317-1	(N/50mm)	NR								
		After heat ageing EN 1296	Width																
		Flexibility at low temperature	Surface											Before heat ageing	EN 1109	°C	-18	≤	
														After heat ageing EN 1296					
Underside	Before heat ageing	-20	≤																
	After heat ageing EN 1296				Decrease after ageing ≤ 15°C														
Resistance to tearing (nail shank)	Length			EN 12310-1	N	150	100	450											
	Width					120	80	450											
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	400	300	500											
	Width					300	200	400											
Tensile properties: elongation	Length			EN 12311-1	%	3	2	4											
	Width					3	2	4											
Resistance to impact				EN 12691	mm	20	≤												
Resistance to static loading				EN 12730	kg	5	≥												
Dimensional stability				EN 1107-1	%	0.5	≤												
Watertightness				EN 1928:2000	-	Pass													
Water vapour transmission properties				EN 1931	-	μ=20000													
Reaction to fire				EN 13501-1	-	F													

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of MATFLEX VV FMP

**Annex 5**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## MATFLEX PY FMP

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES						
							mini	Maxi					
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR							
		After heat ageing EN 1296	Width										
	Average strength	Before heat ageing	Length						EN 12317-1	(N/50mm)	NR		
		After heat ageing EN 1296	Width										
		Before heat ageing	Length										
		After heat ageing EN 1296	Width										
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12310-1	N	200	150	450					
		After heat ageing EN 1296	Width										
	Surface	Before heat ageing							EN 1109	°C	-18	≤	
		After heat ageing EN 1296											
Underside	Before heat ageing		EN 12311-1	N/50 mm	800	500	1000						
	After heat ageing EN 1296												
Resistance to tearing (nail shank)	Length		EN 12311-1	%	40	25	50						
	Width												
Tensile properties: maximum tensile force	Length		EN 12691	mm	20	≤							
	Width												
Tensile properties: elongation	Length		EN 12730	kg	20	≥							
	Width												
Resistance to impact			EN 1107-1	%	0.5	≤							
Resistance to static loading			EN 1928:2000	-	Pass								
Dimensional stability			EN 1931	-	μ=20000								
Watertightness			EN 13501-1	-	F								
Water vapour transmission properties													
Reaction to fire													

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of MATFLEX PY FMP

**Annex 6**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## TOPAZ 25

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES		
							mini	Maxi	
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR			
		Width							
	Average strength	After heat ageing EN 1296	Length						
		Width							
		Before heat ageing	Length						
		Width							
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR			
		Width							
	After heat ageing EN 1296	Length							
	Width								
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-18		≤	
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C			
	Underside	Before heat ageing				-20		≤	
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C			
Resistance to tearing (nail shank)	Length			EN 12310-1	N	100	50	150	
	Width					100	50	150	
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	450	200	550	
	Width					250	120	350	
Tensile properties: elongation	Length			EN 12311-1	%	3	2	4	
	Width					3	2	4	
Resistance to impact				EN 12691	mm	30		≤	
Resistance to static loading				EN 12730	kg	5		<	
Dimensional stability				EN 1107-1	%	0.1		≤	
Watertightness				EN 1928:2000	-	Pass			
Water vapour transmission properties				EN 1931	-	μ=20000			
Reaction to fire				EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of TOPAZ 25

**Annex 7**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## TOPAZ 25 grésé

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR		
		Width						
	After heat ageing EN 1296	Length						
	Width							
Average strength	Before heat ageing	Length						
		Width						
	After heat ageing EN 1296	Length						
	Width							
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR		
		Width						
	After heat ageing EN 1296	Length						
	Width							
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-18		≤
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
	Underside	Before heat ageing				-20		≤
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
Resistance to tearing (nail shank)	Length			EN 12310-1	N	100	50	150
	Width					100	50	150
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	450	200	550
	Width					250	120	350
Tensile properties: elongation	Length			EN 12311-1	%	3	2	4
	Width					3	2	4
Resistance to impact				EN 12691	mm	30		≤
Resistance to static loading				EN 12730	kg	5		<
Dimensional stability				EN 1107-1	%	0.1		≤
Watertightness				EN 1928:2000	-	Pass		
Water vapour transmission properties				EN 1931	-	μ=20000		
Reaction to fire				EN 13501-1	-	F		

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of TOPAZ 25 grésé

**Annex 8**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## HYRENE 40 PY

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES						
							mini	Maxi					
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR							
		After heat ageing EN 1296	Width										
	Average strength	Before heat ageing	Length										
		After heat ageing EN 1296	Width										
		Before heat ageing	Length										
		After heat ageing EN 1296	Width										
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR							
		After heat ageing EN 1296	Width										
	Surface	Before heat ageing							EN 1109	°C	-18	≤	
		After heat ageing EN 1296										Decrease after ageing ≤ 15°C	
Underside	Before heat ageing		After heat ageing EN 1296		-20	≤							
	After heat ageing EN 1296					Decrease after ageing ≤ 15°C							
Resistance to tearing (nail shank)	Length			EN 12310-1	N	240	180	300					
	Width					280	230	360					
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	780	500	900					
	Width					650	500	730					
Tensile properties: elongation	Length			EN 12311-1	%	45	25	55					
	Width					50	25	60					
Resistance to impact				EN 12691	mm	20	≤						
Resistance to static loading				EN 12730	kg	20	≥						
Dimensional stability				EN 1107-1	%	0.3	≤						
Watertightness				EN 1928:2000	-	Pass							
Water vapour transmission properties				EN 1931	-	μ=20000							
Reaction to fire				EN 13501-1	-	F							

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of HYRENE 40 PY

**Annex 9**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## HYRENE 40 PY FP

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES		
							mini	Maxi	
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR			
			Width						
	After heat ageing EN 1296		Length						
			Width						
	Average strength	Before heat ageing	Length						
			Width						
After heat ageing EN 1296		Length							
		Width							
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR			
			Width						
		After heat ageing EN 1296							Length
									Width
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-18	≤		
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C			
	Underside	Before heat ageing				-20	≤		
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C			
Resistance to tearing (nail shank)	Length			EN 12310-1	N	240	180	300	
	Width					280	230	360	
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	780	500	900	
	Width					650	500	730	
Tensile properties: elongation	Length			EN 12311-1	%	45	25	55	
	Width					50	25	60	
Resistance to impact				EN 12691	mm	20	≤		
Resistance to static loading				EN 12730	kg	20	≥		
Dimensional stability				EN 1107-1	%	0.3	≤		
Watertightness				EN 1928:2000	-	Pass			
Water vapour transmission properties				EN 1931	-	μ=20000			
Reaction to fire				EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of HYRENE 40 PY FP

**Annex 10**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## FORCE 4000 S

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES		
							mini	Maxi	
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR			
		After heat ageing EN 1296	Width						
	Average strength	Before heat ageing	Length						
		After heat ageing EN 1296	Width						
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR			
		After heat ageing EN 1296	Width						
		Before heat ageing	Length						
		After heat ageing EN 1296	Width						
Flexibility at low temperature	Surface	Before heat ageing	EN 1109	°C	-18	Decrease after ageing ≤ 15°C	≤		
		After heat ageing EN 1296					≤		
	Underside	Before heat ageing					-20	≤	
		After heat ageing EN 1296						Decrease after ageing ≤ 15°C	
Resistance to tearing (nail shank)	Length	EN 12310-1	N	240	180	300			
	Width						280	230	360
Tensile properties: maximum tensile force	Length	EN 12311-1	N/50 mm	780	500	900			
	Width						650	500	730
Tensile properties: elongation	Length	EN 12311-1	%	45	25	55			
	Width						50	25	60
Resistance to impact				EN 12691	mm	20	≤		
Resistance to static loading				EN 12730	kg	20	≥		
Dimensional stability				EN 1107-1	%	0.3	≤		
Watertightness				EN 1928:2000	-	Pass			
Water vapour transmission properties				EN 1931	-	μ=20000			
Reaction to fire				EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of FORCE 4000 S

**Annex 11**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## FORCE 4000 S FE

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES						
							mini	Maxi					
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR							
		After heat ageing EN 1296	Width										
	Average strength	Before heat ageing	Length										
		After heat ageing EN 1296	Width										
		Before heat ageing	Length										
		After heat ageing EN 1296	Width										
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR							
		After heat ageing EN 1296	Width										
	Surface	Before heat ageing							EN 1109	°C	-18	≤	
		After heat ageing EN 1296											
Underside	Before heat ageing												
	After heat ageing EN 1296												
Resistance to tearing (nail shank)	Length		EN 12310-1	N	240	180	300						
	Width				280	230	360						
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	780	500	900						
	Width				650	500	730						
Tensile properties: elongation	Length		EN 12311-1	%	45	25	55						
	Width				50	25	60						
Resistance to impact			EN 12691	mm	20	≤							
Resistance to static loading			EN 12730	kg	20	≥							
Dimensional stability			EN 1107-1	%	0.3	≤							
Watertightness			EN 1928:2000	-	Pass								
Water vapour transmission properties			EN 1931	-	μ=20000								
Reaction to fire			EN 13501-1	-	F								

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of FORCE 4000 S FE

**Annex 12**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## FORCE 4000 FMG

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES		
							mini	Maxi	
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	200	150	280	
		Width							
	Average strength	After heat ageing EN 1296	Length			Decrease after ageing $\leq 20\%$			
		Width							
		Before heat ageing	Length			160	110	240	
		Width							
After heat ageing EN 1296	Length	Decrease after ageing $\leq 20\%$							
	Width								
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	750	550	900	
		Width							
	After heat ageing EN 1296	Length	Decrease after ageing $\leq 20\%$						
		Width							
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-18		$\leq$	
		After heat ageing EN 1296				Decrease after ageing $\leq 15^\circ\text{C}$			
	Underside	Before heat ageing				-20		$\leq$	
		After heat ageing EN 1296				Decrease after ageing $\leq 15^\circ\text{C}$			
Resistance to tearing (nail shank)	Length			EN 12310-1	N	240	180	300	
	Width					280	230	360	
Tensile properties: maximum tensile force	Length			EN 12311-1	N/50 mm	780	500	900	
	Width					650	500	730	
Tensile properties: elongation	Length			EN 12311-1	%	45	25	55	
	Width					50	25	60	
Resistance to impact				EN 12691	mm	20		$\leq$	
Resistance to static loading				EN 12730	kg	20		$\geq$	
Dimensional stability				EN 1107-1	%	0.3		$\leq$	
Watertightness				EN 1928:2000	-	Pass			
Water vapour transmission properties				EN 1931	-	$\mu=20000$			
Reaction to fire				EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of FORCE 4000 FMG

**Annex 13**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## FORCE 4000 FMG FE

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	200	150	280
			Width					
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
		Width						
Average strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	160	110	240	
		Width						
After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%						
	Width							
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	750	550	900
			Width					
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
		Width						
Flexibility at low temperature	Surface	Before heat ageing	EN 1109	°C	-18	≤		
								Width
	After heat ageing EN 1296	Decrease after ageing ≤ 15°C						
							Width	
Underside	Before heat ageing	EN 1109	°C	-20	≤			
							Width	
After heat ageing EN 1296	Length	Decrease after ageing ≤ 15°C						
	Width							
Resistance to tearing (nail shank)	Length	EN 12310-1	N	240	180	300		
	Width						280	230
Tensile properties: maximum tensile force	Length	EN 12311-1	N/50 mm	780	500	900		
	Width						650	500
Tensile properties: elongation	Length	EN 12311-1	%	45	25	55		
	Width						50	25
Resistance to impact		EN 12691	mm	20	≤			
Resistance to static loading		EN 12730	kg	20	≥			
Dimensional stability		EN 1107-1	%	0.3	≤			
Watertightness		EN 1928:2000	-	Pass				
Water vapour transmission properties		EN 1931	-	μ=20000				
Reaction to fire		EN 13501-1	-	F				

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of FORCE 4000 FMG FE

**Annex 14**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## RUBEROOF 4025 A

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES						
							mini	Maxi					
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR							
		After heat ageing EN 1296	Width										
	Average strength	Before heat ageing	Length						EN 12317-1	(N/50mm)	NR		
		After heat ageing EN 1296	Width										
		Before heat ageing	Length										
		After heat ageing EN 1296	Width										
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12310-1	N	240	180	300					
		After heat ageing EN 1296	Width										
	Surface	Before heat ageing							EN 1109	°C	-18	≤	
		After heat ageing EN 1296											
Underside	Before heat ageing		EN 12311-1	N/50 mm	780	500	900						
	After heat ageing EN 1296												
Resistance to tearing (nail shank)	Length												
	Width												
Tensile properties: maximum tensile force	Length												
	Width												
Tensile properties: elongation	Length												
	Width												
Resistance to impact				EN 12691	mm	20		≤					
Resistance to static loading				EN 12730	kg	20		≥					
Dimensional stability				EN 1107-1	%	0.3		≤					
Watertightness				EN 1928:2000	-	Pass							
Water vapour transmission properties				EN 1931	-	μ=20000							
Reaction to fire				EN 13501-1	-	F							

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of RUBEROOF 4025 A

Annex 15  
of European  
Technical Approval  
ETA-06/0030



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## ALPAL DECOR CPV / EXCEL HR S

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR		
			Width					
		After heat ageing EN 1296	Length					
	Average strength	Before heat ageing	Length					
			Width					
		After heat ageing EN 1296	Length					
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR		
			Width					
		After heat ageing EN 1296	Length					
			Width					
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-14	≤	
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
	Underside	Before heat ageing				-14	≤	
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
Resistance to tearing (nail shank)	Length		EN 12310-1	N	240	180	300	
	Width				280	230	360	
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	780	500	900	
	Width				650	500	730	
Tensile properties: elongation	Length		EN 12311-1	%	45	25	55	
	Width				50	25	60	
Resistance to impact			EN 12691	mm	20		≤	
Resistance to static loading			EN 12730	kg	20		≥	
Dimensional stability			EN 1107-1	%	0.3		≤	
Watertightness			EN 1928:2000	-	Pass			
Water vapour transmission properties			EN 1931	-	μ=20000			
Reaction to fire			EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of ALPAL DÉCOR CPV

**Annex 16**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## ALPAL DECOR CPV FE

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES					
							mini	Maxi				
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR						
			Width									
		After heat ageing EN 1296	Length									
	Average strength	Before heat ageing	Length									
			Width									
		After heat ageing EN 1296	Length									
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR						
			Width									
		After heat ageing EN 1296	Length									
			Width									
Flexibility at low temperature	Surface	Before heat ageing	EN 1109	°C	-14	Decrease after ageing ≤ 15°C	≤					
									After heat ageing EN 1296			
	Underside	Before heat ageing							-14	Decrease after ageing ≤ 15°C	≤	
Resistance to tearing (nail shank)	Length	EN 12310-1	N	240	180	300						
	Width								280	230	360	
Tensile properties: maximum tensile force	Length	EN 12311-1	N/50 mm	780	500	900						
	Width								650	500	730	
Tensile properties: elongation	Length	EN 12311-1	%	45	25	55						
	Width								50	25	60	
Resistance to impact				EN 12691	mm	20	≤					
Resistance to static loading				EN 12730	kg	20	≥					
Dimensional stability				EN 1107-1	%	0.3	≤					
Watertightness				EN 1928:2000	-	Pass						
Water vapour transmission properties				EN 1931	-	μ=20000						
Reaction to fire				EN 13501-1	-	F						

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of ALPAL DÉCOR CPV FE

**Annex 17**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## EXCELSTRUCTURAL

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	200	150	250
		Width						
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
	Width							
Average strength	Before heat ageing	Length		EN 12317-1	(N/50mm)	170	120	220
		Width						
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
	Width							
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	650	500	800
		Width						
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
	Width							
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-14	≤	
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
	Underside	Before heat ageing				-14	≤	
		After heat ageing EN 1296				Decrease after ageing ≤ 15°C		
Resistance to tearing (nail shank)	Length		EN 12310-1	N	250	160	290	
	Width				250	210	290	
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	700	500	820	
	Width				560	500	680	
Tensile properties: elongation	Length		EN 12311-1	%	45	42	50	
	Width				50	42	60	
Resistance to impact			EN 12691	mm	20	≤		
Resistance to static loading			EN 12730	kg	20	≥		
Dimensional stability			EN 1107-1	%	0.3	≤		
Watertightness			EN 1928:2000	-	Pass			
Water vapour transmission properties			EN 1931	-	μ=20000			
Reaction to fire			EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of EXCELSTRUCTURAL

Annex 18  
of European  
Technical Approval  
ETA-06/0030



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## EXCELFLEX

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	150	100	200
			Width					
		After heat ageing EN 1296	Length			Decrease after ageing ≤ 20%		
			Width					
	Average strength	Before heat ageing	Length			120	70	170
			Width					
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
		Width						
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	750	500	1000
			Width					
			After heat ageing EN 1296			Length	Decrease after ageing ≤ 20%	
						Width		
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-14	≤	
			After heat ageing EN 1296					Decrease after ageing ≤ 15°C
	Underside	Before heat ageing				-14	≤	
			After heat ageing EN 1296					Decrease after ageing ≤ 15°C
Resistance to tearing (nail shank)	Length		EN 12310-1	N	600	160	750	
	Width				600	180	800	
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	990	500	1090	
	Width				890	500	950	
Tensile properties: elongation	Length		EN 12311-1	%	30	15	40	
	Width				30	15	40	
Resistance to impact			EN 12691	mm	20	≤		
Resistance to static loading			EN 12730	kg	20	≥		
Dimensional stability			EN 1107-1	%	0.3	≤		
Watertightness			EN 1928:2000	-	Pass			
Water vapour transmission properties			EN 1931	-	μ=20000			
Reaction to fire			EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of EXCELFLEX

**Annex 19**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## EXCELFLEX FE

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES				
							mini	Maxi			
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	150	100	200			
		After heat ageing EN 1296	Width						Decrease after ageing $\leq 20\%$		
	Average strength	Before heat ageing	Length			120	70	170			
		After heat ageing EN 1296	Width						Decrease after ageing $\leq 20\%$		
	Shear resistance of joints	Maximal strength	Before heat ageing			Length	EN 12317-1	(N/50mm)		750	500
			After heat ageing EN 1296			Width			Decrease after ageing $\leq 20\%$		
Surface		Before heat ageing		EN 1109	°C	-16					$\leq$
		After heat ageing EN 1296							Decrease after ageing $\leq 15^\circ\text{C}$		
Underside	Before heat ageing		-16				$\leq$				
	After heat ageing EN 1296							Decrease after ageing $\leq 15^\circ\text{C}$			
Resistance to tearing (nail shank)	Length		EN 12310-1	N	600	160	750				
	Width				600	160	800				
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	990	500	1090				
	Width				890	500	950				
Tensile properties: elongation	Length		EN 12311-1	%	30	15	40				
	Width				30	15	40				
Resistance to impact				EN 12691	mm	20	$\leq$				
Resistance to static loading				EN 12730	kg	20	$\geq$				
Dimensional stability				EN 1107-1	%	0.3	$\leq$				
Watertightness				EN 1928:2000	-	Pass					
Water vapour transmission properties				EN 1931	-	$\mu=20000$					
Reaction to fire				EN 13501-1	-	F					

NR: Not Relevant

### MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

### Characteristics of EXCELFLEX FE

**Annex 20**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## FORCE 50 G FM

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	130	80	180
			Width					
		After heat ageing EN 1296	Length			Decrease after ageing ≤ 20%		
			Width					
	Average strength	Before heat ageing	Length			100	50	150
			Width					
	After heat ageing EN 1296	Length	Decrease after ageing ≤ 20%					
		Width						
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	650	500	850
			Width					
			After heat ageing EN 1296			Length	Decrease after ageing ≤ 20%	
						Width		
Flexibility at low temperature	Surface	Before heat ageing		EN 1109	°C	-14	≤	
			After heat ageing EN 1296					Decrease after ageing ≤ 15°C
	Underside	Before heat ageing				-18	≤	
			After heat ageing EN 1296					Decrease after ageing ≤ 15°C
Resistance to tearing (nail shank)	Length		EN 12310-1	N	250	160	290	
	Width				250	210	290	
Tensile properties: maximum tensile force	Length		EN 12311-1	N/50 mm	700	500	820	
	Width				560	500	680	
Tensile properties: elongation	Length		EN 12311-1	%	45	42	50	
	Width				50	42	60	
Resistance to impact			EN 12691	mm	20	≤		
Resistance to static loading			EN 12730	kg	20	≥		
Dimensional stability			EN 1107-1	%	0.3	≤		
Watertightness			EN 1928:2000	-	Pass			
Water vapour transmission properties			EN 1931	-	μ=20000			
Reaction to fire			EN 13501-1	-	F			

NR: Not Relevant

### MEFAWAME "TOPFIX"

*System of mechanically fastened flexible roof waterproofing membranes*

### Characteristics of FORCE 50 G FM

**Annex 21**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tel: 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

## PYE PV 200 S5

CHARACTERISTICS				TEST METHOD	UNITS	VALUE or STATEMENT	TOLERANCES	
							mini	Maxi
Peel resistance of joints	Maximal strength	Before heat ageing	Length	EN 12316-1	(N/50mm)	NR		
			Width					
	Average strength	After heat ageing EN 1296	Length					
			Width					
		Before heat ageing	Length					
			Width					
After heat ageing EN 1296		Length						
		Width						
		Length						
		Width						
Shear resistance of joints	Maximal strength	Before heat ageing	Length	EN 12317-1	(N/50mm)	NR		
			Width					
	After heat ageing EN 1296	Length						
		Width						
Flexibility at low temperature	Surface	Before heat ageing	EN 1109	°C	-24	Decrease after ageing ≤ 15°C	≤	
	Underside	Before heat ageing						
		After heat ageing EN 1296						
Resistance to tearing (nail shank)	Length	EN 12310-1	N	270	200	350		
	Width						300	220
Tensile properties: maximum tensile force	Length	EN 12311-1	N/50 mm	980	800	1080		
	Width						900	800
Tensile properties: elongation	Length	EN 12311-1	%	50	40	60		
	Width						55	40
Resistance to impact			EN 12691	mm	20	≤		
Resistance to static loading			EN 12730	kg	20	≥		
Dimensional stability			EN 1107-1	%	0.5	≤		
Watertightness			EN 1928:2000	-	Pass			
Water vapour transmission properties			EN 1931	-	μ=20000			
Reaction to fire			EN 13501-1	-	E			

NR: Not Relevant

<b>MEFAWAME "TOPFIX"</b> <i>System of mechanically fastened flexible roof waterproofing membranes</i>	<b>Annex 22</b> of European Technical Approval <b>ETA-06/0030</b>
<b>Characteristics of PYE PV 200 S5</b>	

Name of the fastener <i>Producer</i>	Axial load <sup>(3)</sup> (N)	Resistance to corrosion : OK or not relevant <sup>(1)</sup>	Resistance to unwinding	Mechanical resistance before and after heat ageing : OK or not OK <sup>(2)</sup>
VMS 2C + Ø 40 <i>LR ETANCO</i>	2000	OK	OK	not relevant
VMS 2C + 64x64 <i>LR ETANCO</i>	2000	OK	OK	not relevant
VMS 2C + 40x40 <i>LR ETANCO</i>	2000	OK	OK	not relevant
VMS 2C + AXTER® <i>LR ETANCO</i>	2000	OK	OK	not relevant

<sup>(1)</sup> OK = less than 15% surface corrosion after the test in accordance of the § 5.3.7.1 of the ETAG 006  
Not relevant = stainless steel fasteners or plastic sleeves

<sup>(2)</sup> OK = decrease in the drop height is equal to or less than 20% after ageing

<sup>(3)</sup> Declared values

**MEFAWAME "TOPFIX"**

*System of mechanically fastened flexible roof waterproofing membranes*

**Characteristics of fasteners**

**Annex 23**  
of European  
Technical Approval  
**ETA-06/0030**

First layer (fastened)	Fastener	Second layer
TOPFIX FMP grésé	<ul style="list-style-type: none"> <li>▪ VMS 2C + Ø40</li> <li>▪ VMS 2C + 64X64</li> </ul>	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
TOPFIX FMP	<ul style="list-style-type: none"> <li>▪ VMS 2C + Ø40</li> <li>▪ VMS 2C + 64X64</li> </ul>	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
TOPFIX PY FMP Grésé	VMS 2C + Ø40	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>

**MEFAWAME "TOPFIX"**

*System of mechanically fastened flexible roof waterproofing membranes*

**Different kits (1 kit = 1 fastened layer+1 fastening+1 2<sup>nd</sup> layer)**

**Annex 24**

of European  
Technical Approval  
**ETA-06/0030**

First layer (fastened)	Fastener	Second layer
TOPFIX PY FMP	VMS 2C + Ø40	<ul style="list-style-type: none"> <li>▪ TOPAZ 25</li> <li>▪ TOPAZ 25 Grésé</li> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
MATFLEX VV FMP	VMS 2C + 40x40	<ul style="list-style-type: none"> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>
MATFLEX PY FMP	VMS 2C + AXTER®	<ul style="list-style-type: none"> <li>▪ HYRENE 40 PY</li> <li>▪ HYRENE 40 PY FP</li> <li>▪ FORCE 4000 S</li> <li>▪ FORCE 4000 S FE</li> <li>▪ FORCE 4000 FMG</li> <li>▪ FORCE 4000 FMG FE</li> <li>▪ RUBEROOF 4025 A</li> <li>▪ ALPAL DECOR CPV</li> <li>▪ ALPAL DECOR CPV FE</li> <li>▪ EXCELSTRUCTURAL</li> <li>▪ EXCELFLEX</li> <li>▪ EXCELFLEX FE</li> <li>▪ FORCE 50 G FM</li> <li>▪ PYE PV 200 S5</li> </ul>

**MEFAWAME "TOPFIX"***System of mechanically fastened flexible roof waterproofing membranes***Different kits (1 kit = 1 fastened layer+1 fastening+1 2<sup>nd</sup> layer)****Annex 25**  
of European  
Technical Approval  
**ETA-06/0030**

Kit	W admissible*	External fire performance
Kits with TOPFIX FMP grésé fastened with VMS 2C + Ø40	443 N/fastener	npd
Kits with TOPFIX FMP grésé fastened with VMS 2C + 64x64 or VMS 2C + Ø40	713 N/fastener	npd
Kits with TOPFIX FMP fastened with VMS 2C + Ø40	443 N/fastener	npd
Kits with TOPFIX PY FMP fastened with VMS 2C + Ø40	713 N/fastener	npd
Kits with MATFLEX VV FMP fastened with VMS 2C + 40x40	364 N/fastener	npd
Kits with MATFLEX PY FMP fastened with VMS 2C + AXTER®	369 N/fastener	npd

\*Determined with a full scale wind uplift test with steel substrate. Axial loading resistance of the fastener used in the full scale concept is :  $R_{oc} = 2000 \text{ N}$

In order to determine the  $W_{adm}$  of systems with other substrates than the reference substrate, or other fasteners ( $R_{nc}$ ) owning a separate ETA issued on the basis of ETAG006 or *Fastener PASS FOR MEFAWAME ETA "Intermediate evaluation in compliance with the European Technical Approval Guideline n°006"* issued on the basis of ETAG006, the following applies :

- if  $R_{nc} \geq R_{oc} \Rightarrow W_{adm} (nc) = W_{adm} (oc)$
- if  $R_{nc} < R_{oc} \Rightarrow W_{adm} (nc) = (R_{nc} / R_{oc}) * W_{adm} (oc)$

The adaptation of the full scale test results for systems with other substrates than the reference substrate, or other fasteners ( $R_{nc}$ ) owning a separate ETA or *Fastener PASS* issued on the basis of ETAG 006, is possible if:

- the plates are protected against corrosion;
- the minimal thickness of the metallic plates is:  
0.75 mm, if they are ribbed,  
1,00 mm, if they are flat.

In the new system, the use of plates that are different from those in the reference system is possible under the following conditions:

- The steel plates are permitted with their resistance R determined in the whole system,
- The metal grades and thicknesses are  $\geq$  those of reference ones,
- The dimensions comply with the conditions in the following Table.

plates "oc"	plates "nc"	
	Round washers	Square, rectangular or oblong washers
Rounds: $\varnothing$ test	$\varnothing \geq \varnothing$ test	Width and length $\geq \varnothing$ test
Square, rectangular or oblong	$\varnothing \geq$ diagonal of the washer tested	Dimensions $\geq$ those tested and positioned in the same direction

oc = original combination (tested)  
nc = new combination

The fasteners have to be in conformity with the specifications given in section 1.1.2 and have to own an ETA delivered on the basis on the ETAG 006 or a FASTENER PASS FOR MEFAWAME ETA "Intermediate evaluation in compliance with the European Technical Approval Guideline n°006" .

<b>MEFAWAME "TOPFIX"</b>  <i>System of mechanically fastened flexible roof waterproofing membranes</i>	<b>Annex 26</b> of European Technical Approval <b>ETA-06/0030</b>
<b>Characteristics of kits</b>	



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

**ETA TOPFIX**

**TECHNICAL NOTICE n°1**

**LAYERS**


<p>Fastened layer Second layer</p>	<b>TOPFIX FMP Grésé</b>			
	TOPAZ 25	FORCE 4000 S	RUBEROOF4025 A	EXCELFLEX
	TOPAZ 25 Grésé	FORCE 4000 S FE	ALPAL DECOR CPV	EXCELFLEX FE
	HYRENE 40 PY	FORCE 4000 FMG	ALPAL DECOR CPV FE	FORCE 50 G FM
	HYRENE 40 PY FP	FORCE 4000 FMG FE	EXCELSTRUCTURAL	PYE PV 200 S5

**FASTENER**

**Reference Screw :** VMS 2C      Roc = 200 daN  
**Reference Plate :** Ø 40

Adaption of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

**USAGE**

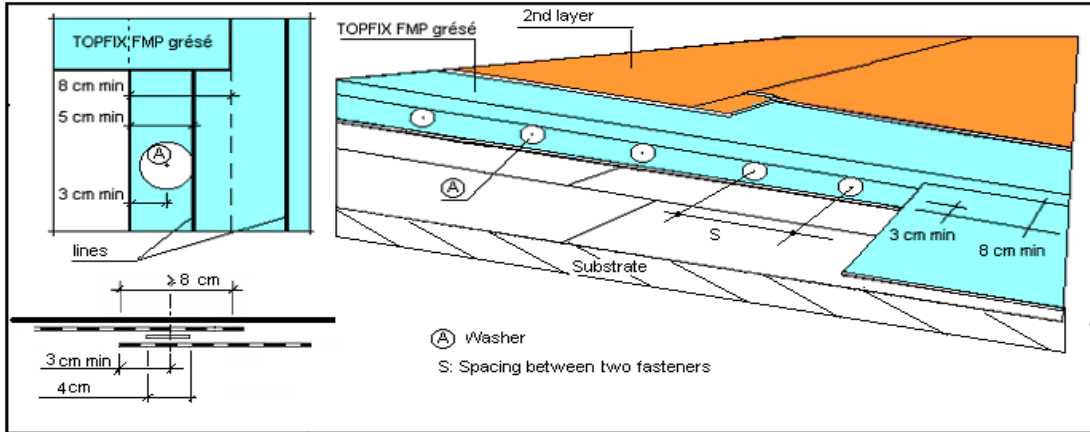

The first layer is loose laid and mechanically fixed along the selvedge. It has two lines marked on the surface which are used for positioning the fasteners and the overlaps. Side and end laps are torch welded.  
The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer.  
End laps are 10cm on both layers.

**Spacing between two fasteners (S)**

The density of fasteners is calculated according to:

- Position on the roof
  - Admissible load per fastener: Wadm (N/fas)
  - National requirements
  - Minimum spacing in row: 12 cm
  - Maximum spacing in row : according to national requirements
- When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip is min. 16cm wide and of the same material as the first layer membrane. It is fully bonded by torching on to the first layer to cover the extra fasteners.

**Calculation of spacing (S) between two fasteners**       $S \leq 1/(D \times L) = Wadm / (L \times Dp)$  ; Wadm = 443 N/fas on steel deck

D = minimal density of fasteners =  $Dp / Wadm$   
L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 92 cm  
 $Dp(N/m^2)$  = Wind effect on the specified area.  $Dp$  is determined according to the national requirements


**FASTENING AT UPSTANDS AND PENETRATIONS**

**Upstands**


System of fastening: spot fastening  
The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm  
The flashing design must conform to national requirements

**Penetrations**


Fastener at every corner of the plate. Their design must conform to national requirements

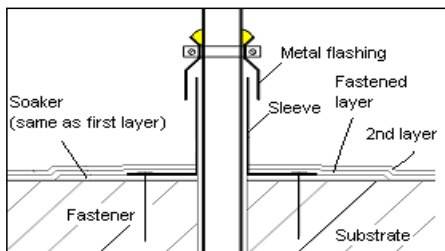

**Penetration**

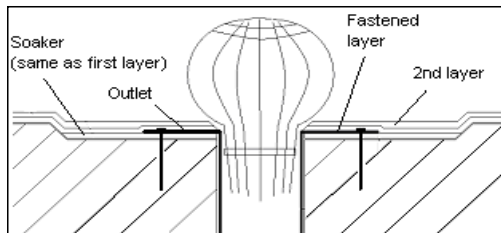

**Rainwater outlet**

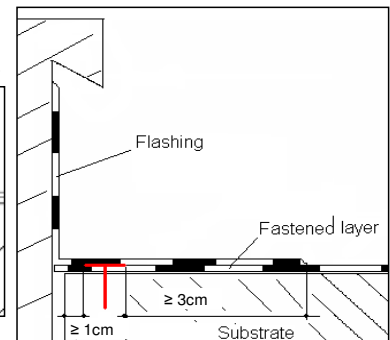

**Upstand**

**MEFAWAME "TOPFIX"**  
System of mechanically fastened flexible roof waterproofing membranes

Technical Notice about kits with TOPFIX FMP grésé fastened with VMS 2C + Ø40

**Annex 27**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

TECHNICAL NOTICE n°2

LAYERS


	Fastened layer	TOPFIX FMP			
	Second layer	TOPAZ 25	FORCE 4000 S	RUBEROOF4025 A	EXCEL FLEX
		TOPAZ 25 Grésé	FORCE 4000 S FE	ALPAL DECOR CPV	EXCEL FLEX FE
		HYRENE 40 PY	FORCE 4000 FMG	ALPAL DECOR CPV FE	FORCE 50 G FM
		HYRENE 40 PY FP	FORCE 4000 FMG FE	EXCEL STRUCTURAL	PYE PV 200 S5

FASTENER

Reference Screw : VMS 2C Roc = 200 daN  
Reference Plate : Ø 40

Adaptation of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

USAGE

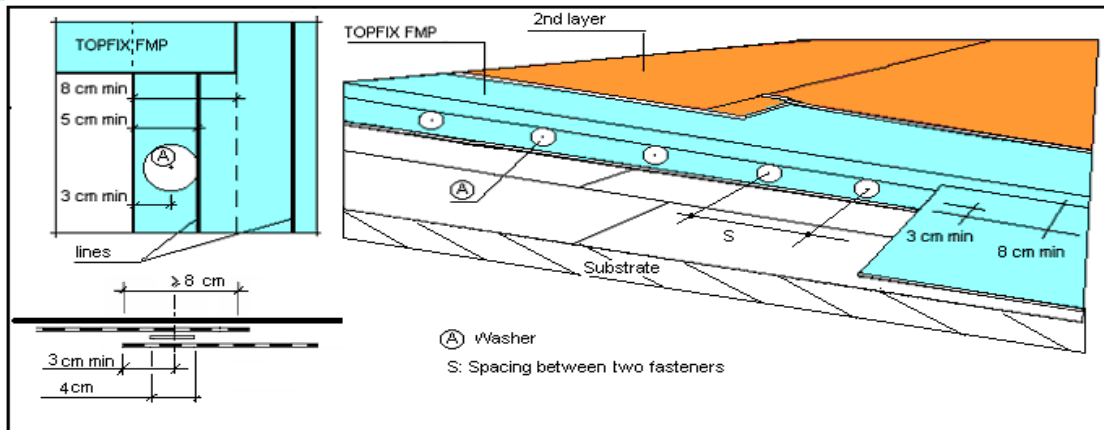

The first layer is loose laid and mechanically fixed along the selvedge. It has two lines marked on the surface which are used for positioning the fasteners and the overlaps. Side and end laps are torch welded. The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer. End laps are 10cm on both layers.

Spacing between two fasteners (S)

The density of fasteners is calculated according to:

- Position on the roof
- Admissible load per fastener: Wadm (N/fas)
- National requirements
- Minimum spacing in row: 12 cm
- Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip is min. 16cm wide and of the same material as the first layer membrane. It is fully bonded by torching on to the first layer to cover the extra fasteners.

Calculation of spacing (S) between two fasteners  $S \leq 1/(DxL) = Wadm/(LxDp)$  ; Wadm = 443 N/fas on steel deck

D = minimal density of fasteners = Dp / Wadm

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 92 cm

Dp(N/m²) = Wind effect on the specified area. Dp is determined according to the national requirements

FASTENING AT UPSTANDS AND PENETRATIONS

Upstands


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm

The flashing design must conform to national requirements

Penetrations

Fastener at every corner of the plate. Their design must conform to national requirements

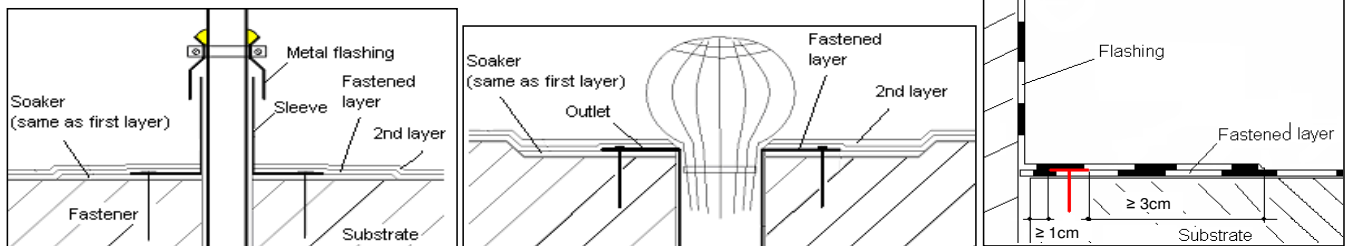

Penetration

Rainwater outlet

Upstand

MEFAWAME "TOPFIX"  
System of mechanically fastened flexible roof waterproofing membranes

Technical Notice about kits with TOPFIX FMP fastened with VMS 2C + Ø40

Annex 28  
of European  
Technical Approval  
ETA-06/0030



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

TECHNICAL NOTICE n°3

LAYERS


	<b>Fastened layer</b>	<b>TOPFIX FMP Grésé</b>			
	<b>Second layer</b>	TOPAZ 25 TOPAZ 25 Grésé HYRENE 40 PY HYRENE 40 PY FP	FORCE 4000 S FORCE 4000 S FE FORCE 4000 FMG FORCE 4000 FMG FE	RUBEROOF4025 A ALPAL DECOR CPV ALPAL DECOR CPV FE EXCELSTRUCTURAL	EXCELFLEX EXCELFLEX FE FORCE 50 G FM PYE PV 200 S5

FASTENER

**Reference Screw :** VMS 2C Roc = 200 daN  
**Reference Plate :** 64x64

Adaption of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

USAGE

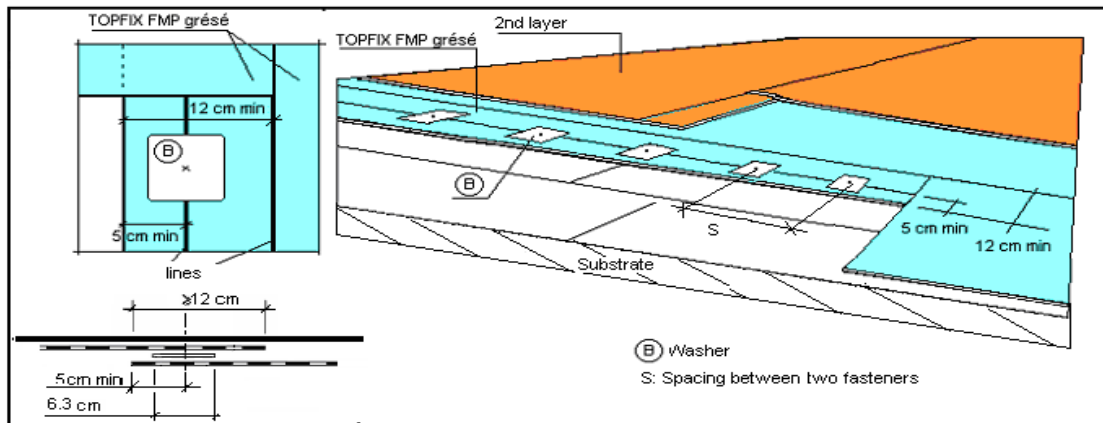

The first layer is loose laid and mechanically fixed along the selvedge. It has two lines marked on the surface which are used for positioning the fasteners and the overlaps. Side and end laps are torch welded.  
The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer.  
End laps are 10cm on both layers.

Spacing between two fasteners (S)

The density of fasteners is calculated according to:

- Position on the roof
- Admissible load per fastener: Wadm (N/fas)
- National requirements
- Minimum spacing in row: 12 cm
- Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip is min. 16cm wide and of the same material as the first layer membrane. It is fully bonded by torching on to the first layer to cover the extra fasteners.

Calculation of spacing (S) between two fasteners

$$S \leq 1/(D \times L) = Wadm / (L \times Dp) ; Wadm = 713 \text{ N/fas on steel deck}$$

D = minimal density of fasteners = Dp / Wadm

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 88 cm

Dp(N/m²) = Wind effect on the specified area. Dp is determined according to the national requirements

FASTENING AT UPSTANDS AND PENETRATIONS

Upstands


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm


The flashing design must conform to national requirements

Penetrations


Fastener at every corner of the plate. Their design must conform to national requirements

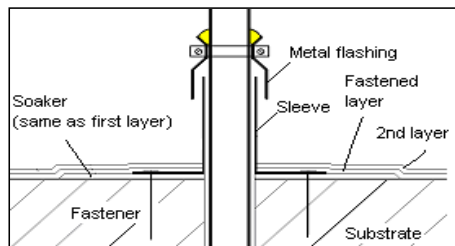

Penetration

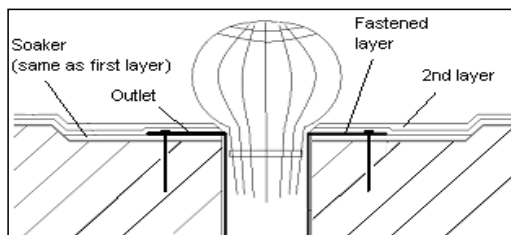

Rainwater outlet

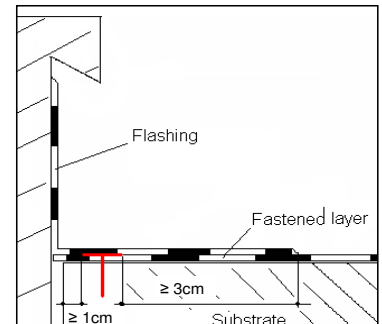

Upstand

**MEFAWAME "TOPFIX"**  
System of mechanically fastened flexible roof waterproofing membranes

Technical Notice about kits with TOPFIX FMP grésé fastened with VMS 2C + 64x64

**Annex 29**  
of European  
Technical Approval  
**ETA-06/0030**



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

TECHNICAL NOTICE n°4

LAYERS



Fastened layer  
Second layer

TOPFIX FMP

TOPAZ 25  
TOPAZ 25 Grésé  
HYRENE 40 PY  
HYRENE 40 PY FP

FORCE 4000 S  
FORCE 4000 S FE  
FORCE 4000 FMG  
FORCE 4000 FMG FE

RUBEROOF4025 A  
ALPAL DECOR CPV  
ALPAL DECOR CPV FE  
EXCELSTRUCTURAL


EXCELFLEX  
EXCELFLEX FE  
FORCE 50 G FM  
PYE PV 200 S5

FASTENER

Reference Screw : VMS 2C Roc = 200 daN  
Reference Plate : 64x64

Adaption of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

USAGE

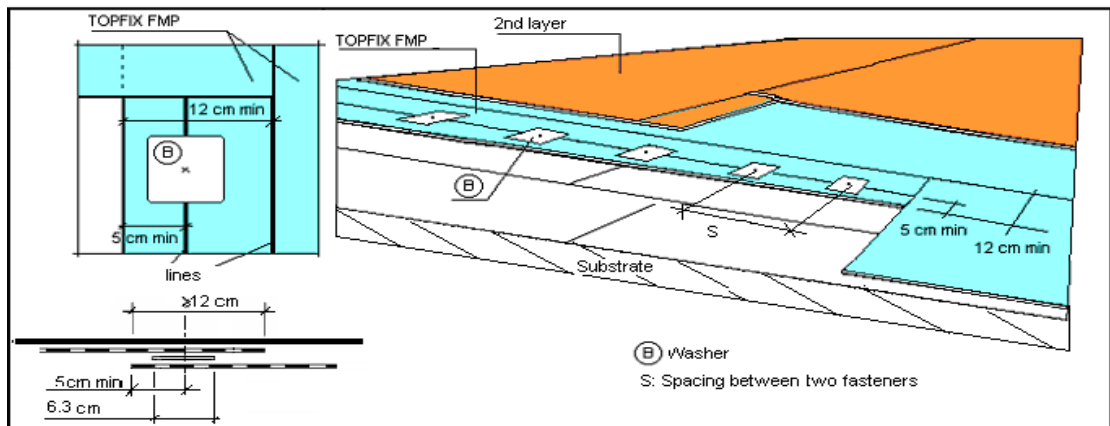

The first layer is loose laid and mechanically fixed along the selvedge. It has two lines marked on the surface which are used for positioning the fasteners and the overlaps. Side and end laps are torch welded.  
The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer. End laps are 10cm on both layers.

Spacing between two fasteners (S)

The density of fasteners is calculated according to:

Position on the roof

Admissible load per fastener: Wadm (N/fas)

National requirements

Minimum spacing in row: 12 cm

Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip is min. 16cm wide and of the same material as the first layer membrane. It is fully bonded by torching on to the first layer to cover the extra fasteners.

Calculation of spacing (S) between two fasteners

$$S \leq 1/(D \times L) = Wadm / (L \times Dp) ; Wadm = 713 \text{ N/fas on steel deck}$$

D = minimal density of fasteners = Dp / Wadm

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 88 cm

Dp(N/m²) = Wind effect on the specified area. Dp is determined according to the national requirements

FASTENING AT UPSTANDS AND PENETRATIONS



Upstands


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm


The flashing design must conform to national requirements

Penetrations


Fastener at every corner of the plate. Their design must conform to national requirements

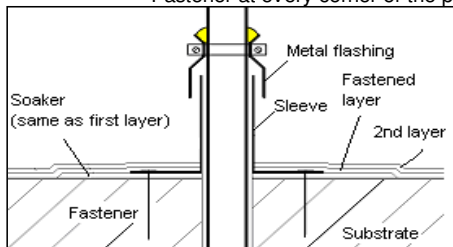

Penetration

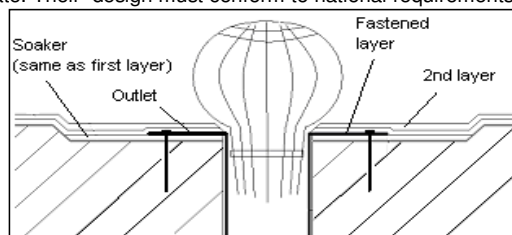

Rainwater outlet

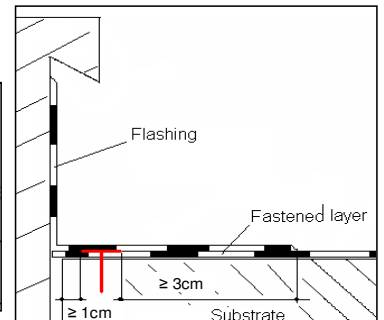

Upstand

MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

Annex 30

of European Technical Approval

ETA-06/0030

Technical Notice about kits with TOPFIX FMP fastened with VMS 2C + 64x64



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

TECHNICAL NOTICE n°5

LAYERS


	<b>Fastened layer</b>	TOPFIX PY FMP Grésé			
	<b>Second layer</b>	TOPAZ 25	FORCE 4000 S	RUBEROOF4025 A	EXCELFLEX
		TOPAZ 25 Grésé	FORCE 4000 S FE	ALPAL DECOR CPV	EXCELFLEX FE
		HYRENE 40 PY	FORCE 4000 FMG	ALPAL DECOR CPV FE	FORCE 50 G FM
		HYRENE 40 PY FP	FORCE 4000 FMG FE	EXCELSTRUCTURAL	PYE PV 200 S5

FASTENER

**Reference Screw :** VMS 2C      Roc = 200 daN  
**Reference Plate :** Ø 40

Adaptation of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

USAGE

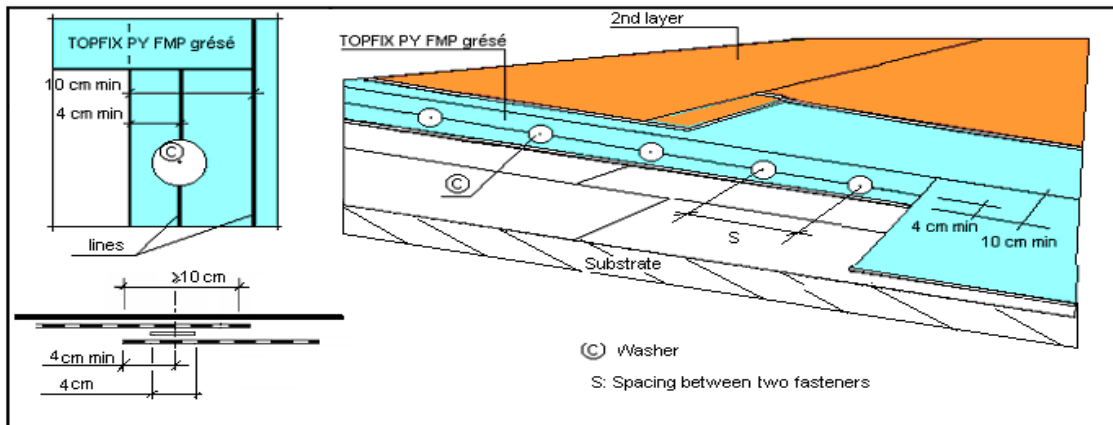

The first layer is loose laid and mechanically fixed along the selvedge. It has two lines marked on the surface which are used for positioning the fasteners and the overlaps. Side and end laps are torch welded. The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer. End laps are 10cm on both layers.

Spacing between two fasteners (S)

The density of fasteners is calculated according to:

- Position on the roof
- Admissible load per fastener: Wadm (N/fas)
- National requirements
- Minimum spacing in row: 12 cm
- Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip is min. 16cm wide and of the same material as the first layer membrane. It is fully bonded by torching on to the first layer to cover the extra fasteners.

Calculation of spacing (S) between two fasteners

$$S \leq 1/(D \times L) = Wadm / (L \times Dp) ; Wadm = 713 \text{ N/fas on steel deck}$$

D = minimal density of fasteners = Dp / Wadm

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 90 cm

Dp(N/m²) = Wind effect on the specified area. Dp is determined according to the national requirements

FASTENING AT UPSTANDS AND PENETRATIONS



Upstands


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm


The flashing design must conform to national requirements

Penetrations


Fastener at every corner of the plate. Their design must conform to national requirements

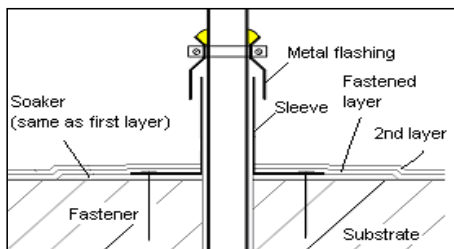

Penetration

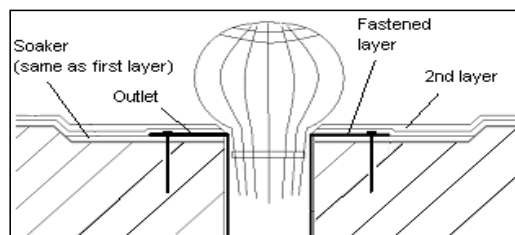

Rainwater outlet

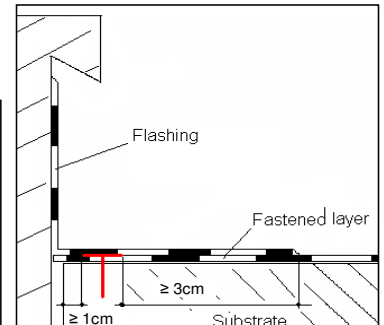

Upstand

MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

Annex 31

of European  
Technical Approval  
ETA-06/0030

Technical Notice about kits with TOPFIX PY FMP grésé fastened with VMS 2C + Ø40



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

TECHNICAL NOTICE n°6

LAYERS


	<b>Fastened layer</b>	<b>TOPFIX PY FMP</b>			
	<b>Second layer</b>	TOPAZ 25	FORCE 4000 S	RUBEROOF4025 A	EXCELFLEX
		TOPAZ 25 Grésé	FORCE 4000 S FE	ALPAL DECOR CPV	EXCELFLEX FE
		HYRENE 40 PY	FORCE 4000 FMG	ALPAL DECOR CPV FE	FORCE 50 G FM
		HYRENE 40 PY FP	FORCE 4000 FMG FE	EXCELSTRUCTURAL	PYE PV 200 S5

FASTENER

**Reference Screw :** VMS 2C      Roc = 200 daN  
**Reference Plate :** Ø 40

Adaptation of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

USAGE

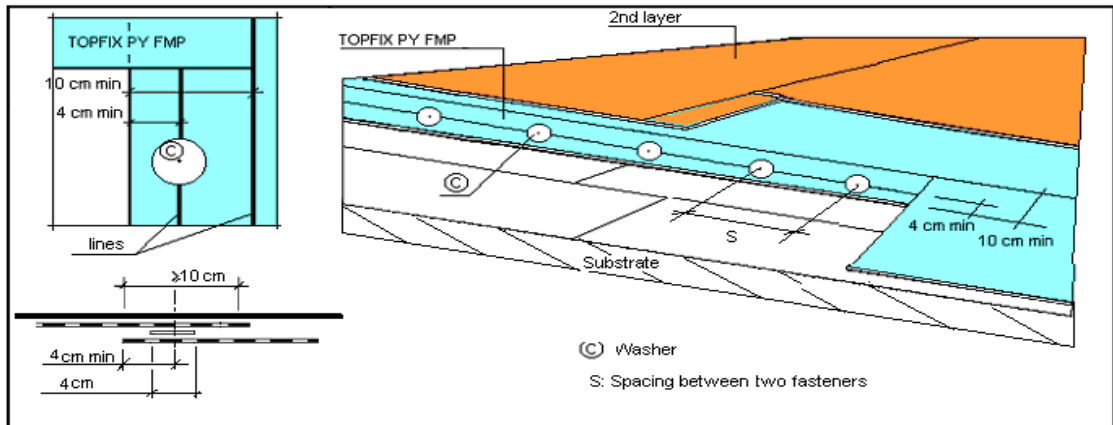

The first layer is loose laid and mechanically fixed along the selvedge. It has two lines marked on the surface which are used for positioning the fasteners and the overlaps. Side and end laps are torch welded. The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer. End laps are 10cm on both layers.

Spacing between two fasteners (S)

The density of fasteners is calculated according to:

- Position on the roof
- Admissible load per fastener: Wadm (N/fas)
- National requirements
- Minimum spacing in row: 12 cm
- Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip is min. 16cm wide and of the same material as the first layer membrane. It is fully bonded by torching on to the first layer to cover the extra fasteners.

Calculation of spacing (S) between two fasteners

$$S \leq 1/(D \times L) = Wadm / (L \times Dp) ; Wadm = 713 \text{ N/fas on steel deck}$$

D = minimal density of fasteners = Dp / Wadm

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 90 cm

Dp(N/m²) = Wind effect on the specified area. Dp is determined according to the national requirements

FASTENING AT UPSTANDS AND PENETRATIONS



Upstands


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm


The flashing design must conform to national requirements

Penetrations


Fastener at every corner of the plate. Their design must conform to national requirements

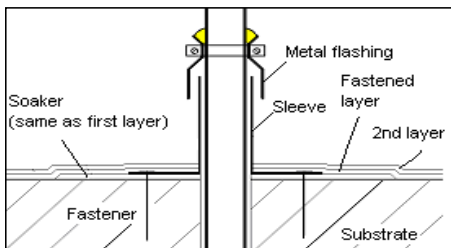

Penetration

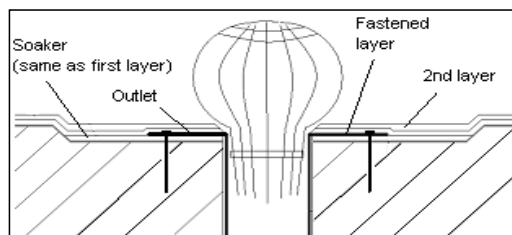

Rainwater outlet

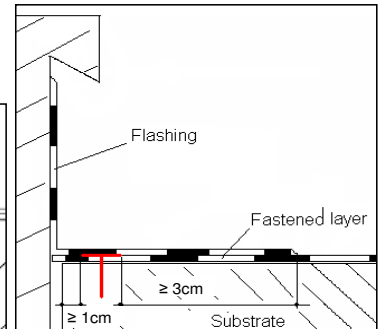

Upstand

MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

Annex 32

of European  
Technical Approval  
ETA-06/0030

Technical Notice about kits with TOPFIX PY FMP fastened with VMS 2C + Ø40



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

TECHNICAL NOTICE n°7

LAYERS



Fastened layer  
Second layer

MATFLEX VV FMP


HYRENE 40 PY	FORCE 4000 FMG	ALPAL DECOR CPV FE	FORCE 50 G FM
HYRENE 40 PY FP	FORCE 4000 FMG FE	EXCELSTRUCTURAL	PYE PV 200 S5
FORCE 4000 S	RUBEROOF4025 A	EXCELFLEX	
FORCE 4000 S FE	ALPAL DECOR CPV	EXCELFLEX FE	

FASTENER

Reference Screw : VMS 2C Roc = 200 daN  
Reference Plate : 40x40

Adaptation of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

USAGE

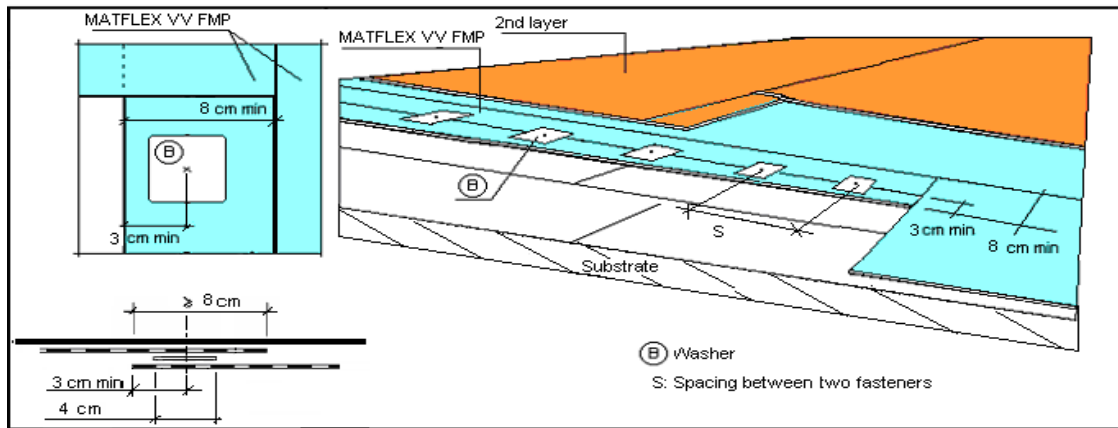

The first layer is loose laid and mechanically fixed along the selvedge. Side laps are self adhesive and end laps are torch welded. The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer. End laps are 10cm on both layers.

Spacing between two fasteners (S)

The density of fasteners is calculated according to:

- Position on the roof
- Admissible load per fastener: Wadm (N/fas)
- National requirements
- Minimum spacing in row: 12 cm
- Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip (TOPFIX FMP Grésé, TOPFIX FMP, TOPFIX PY FMP Grésé, TOPFIX PY FMP) is min. 16cm wide. It is fully bonded by torching on to the first layer to cover the extra fasteners.

Calculation of spacing (S) between two fasteners

$$S \leq 1/(D \times L) = Wadm / (L \times Dp) ; Wadm = 364 \text{ N/fas on steel deck}$$

D = minimal density of fasteners =  $Dp / Wadm$

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 92 cm

$Dp(N/m^2) = \text{Wind effect on the specified area. } Dp \text{ is determined according to the national requirements}$

FASTENING AT UPSTANDS AND PENETRATIONS



Upstands


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm


The flashing design must conform to national requirements

Penetrations


Fastener at every corner of the plate. Their design must conform to national requirements

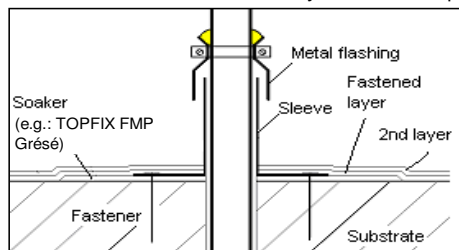

Penetration

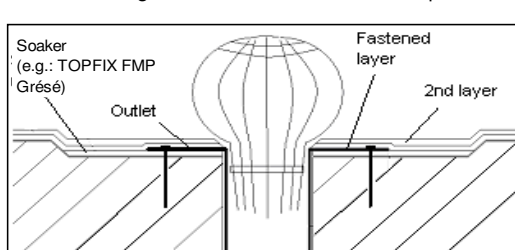

Rainwater outlet

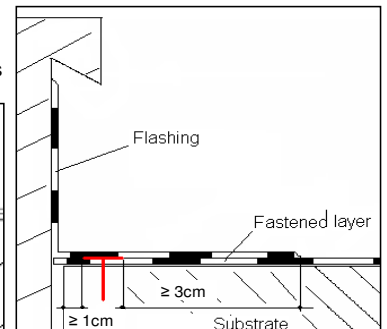

Upstand

MEFAWAME "TOPFIX"

System of mechanically fastened flexible roof waterproofing membranes

Technical Notice about kits with MATFLEX VV FMP fastened with VMS 2C + 40x40

Annex 33

of European  
Technical Approval  
ETA-06/0030



8, avenue Félix d'Hérelle F-75016 PARIS  
Tél. : 00 33 1 46 09 39 60 - Fax : 00 33 1 46 09 39 61

ETA TOPFIX

**TECHNICAL NOTICE n°8**

**LAYERS**


<b>Fastened layer</b> Second layer	<b>MATFLEX PY FMP</b>			
	HYRENE 40 PY HYRENE 40 PY FP FORCE 4000 S FORCE 4000 S FE	FORCE 4000 FMG FORCE 4000 FMG FE RUBEROOF4025 A ALPAL DECOR CPV	ALPAL DECOR CPV FE EXCELSTRUCTURAL EXCELFLEX EXCELFLEX FE	FORCE 50 G FM PYE PV 200 S5

**FASTENER**

**Reference Screw :** VMS 2C      Roc = 200 daN  
**Reference Plate :** AXTER

Adaptation of system to use other fasteners or washers is described in the "cahier du CSTB n° 3532: Wind resistance of roof waterproofing systems" dated July 2005. These are only permitted if they achieve an "fastener pass for MEFAWAME ETA" by their manufacturer.

**USAGE**

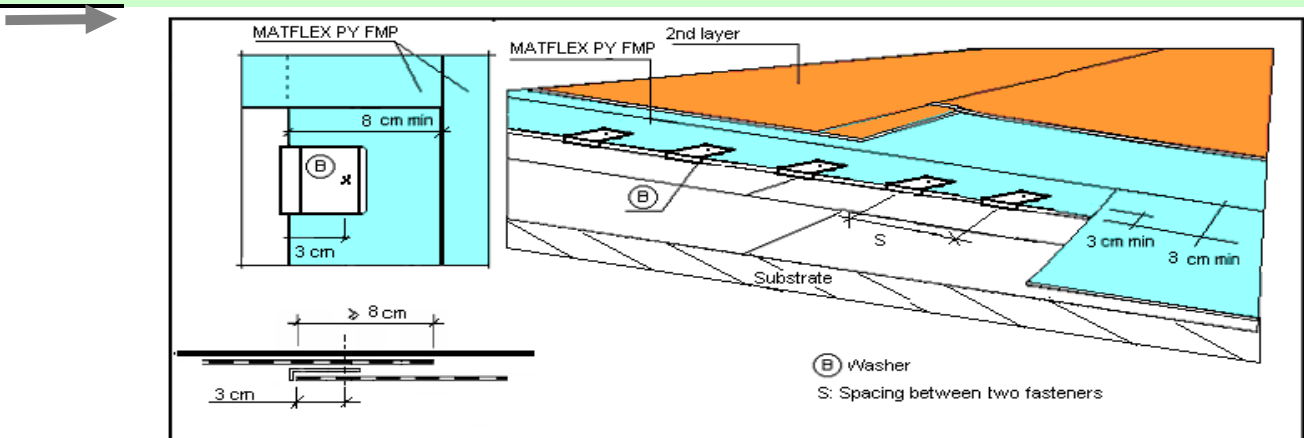

The first layer is loose laid and mechanically fixed along the selvedge. Side laps are self adhesive and end laps are torch welded. The second layer is torch welded, with min. 6cm laps, staggered by at least 10cm, or at right angles to those on the first layer. End laps are 10cm on both layers.

**Spacing between two fasteners (S)**

The density of fasteners is calculated according to:

- Position on the roof
- Admissible load per fastener: Wadm (N/fas)
- National requirements
- Minimum spacing in row: 12 cm
- Maximum spacing in row : according to national requirements

When the spacing between fasteners is calculated to be less than 12 cm, it is necessary to install extra fasteners with bridging strips.

The first layer is fixed along the selvedge with an extra row of fasteners in the middle of the layer; spacing between the selvedge fasteners and the middle fasteners should be identical. The bridging strip (TOPFIX FMP Grésé, TOPFIX FMP, TOPFIX PY FMP Grésé, TOPFIX PY FMP) is min. 16cm wide. It is fully bonded by torching on to the first layer to cover the extra fasteners.

**Calculation of spacing (S) between two fasteners**

$$S \leq 1/(D \times L) = Wadm / (L \times Dp) ; Wadm = 369 \text{ N/fas on steel deck}$$

D = minimal density of fasteners = Dp / Wadm

L = spacing between two rows of fasteners (width of the fastened layer - width of the overlap) = 92 cm

Dp(N/m²) = Wind effect on the specified area. Dp is determined according to the national requirements

**FASTENING AT UPSTANDS AND PENETRATIONS**

**Upstands**


System of fastening: spot fastening

The spacing (S) between two fasteners is determined using the same method as before. Maximum spacing : 33 cm


The flashing design must conform to national requirements

**Penetrations**


Fastener at every corner of the plate. Their design must conform to national requirements

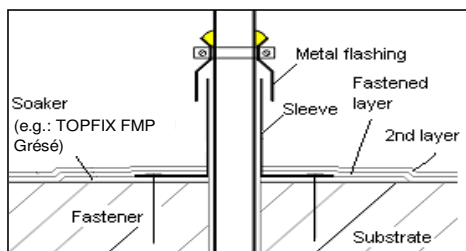

**Penetration**

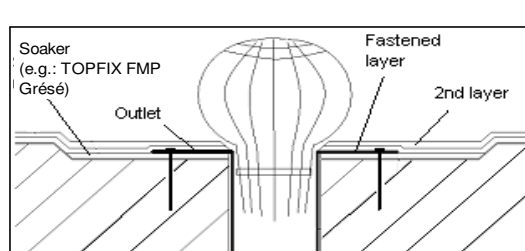

**Rainwater outlet**

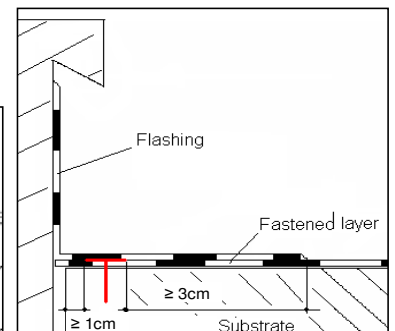

**Upstand**

**MEFAWAME "TOPFIX"**  
System of mechanically fastened flexible roof waterproofing membranes

Technical Notice about kits with MATFLEX PY FMP fastened with VMS 2C + AXTER®

**Annex 34**  
of European  
Technical Approval  
**ETA-06/0030**

